

MicroC/OS-II



Flash-Port for C167 Architectures and Keil μ Vision IDE

Porting MicroC/OS-II

- Large number of ports available
 - for different μ P/ μ C architectures
 - for different Compiler-IDEs
- Flexible configuration management
- Flash-Port for C167 architectures
 - Supports Phytec SK167
 - Supports Keil MCB167net
 - Free evaluation version of Keil μ V2 IDE can be used for application development
 - An *Application Skeleton* provides easy startup



Memory Model

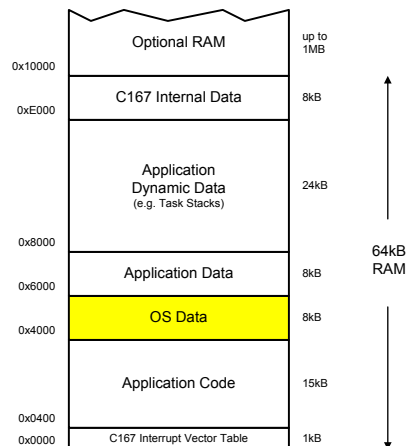

Phytec SK167 + ED1

- C167CS-LM, 20MHz
- 1MB RAM, 1MB Flash
- CS8900 Ethernet-Controller (10Mbit/s)
- C167CR-LM, 20MHz
- 64kB RAM, 256kB Flash
- Multiplexed Display & Keyboard (ED1)

Keil MCB167Net

